


オフセット配管（繰り返し動きの無い配管）の可撓部長さに対するオフセット量

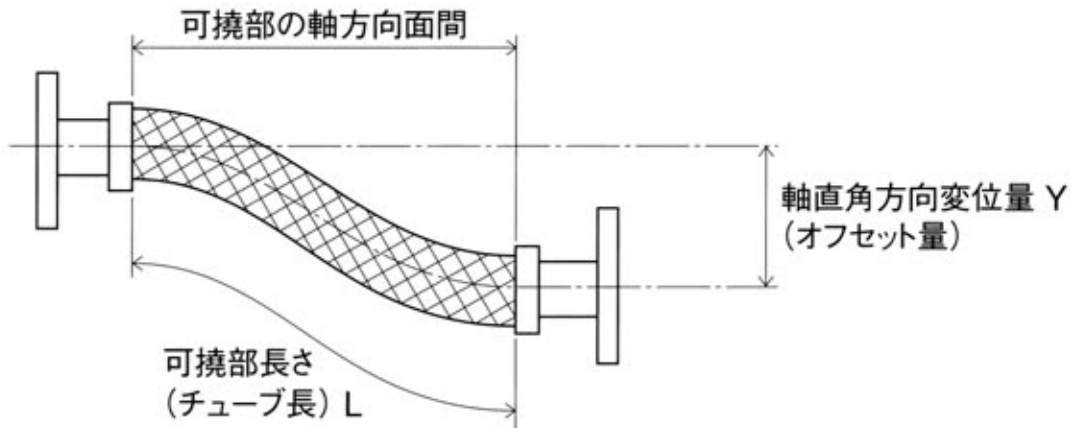

単位：mm

口径	最小 曲げ半径	軸直角方向変位量 Y (縮み代 S)	可撓部長さ(チューブ長)														
			200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
8A	20	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
10A	25	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
15A	30	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
20A	35	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
25A	40	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
32A	60	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
40A	70	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
50A	75	Y	200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(314)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
65A	105	Y	145	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(265)	(471)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
80A	200	Y	53	315	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(209)	(339)	(628)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
100A	250	Y	41	100	200	500	600	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(206)	(332)	(464)	(785)	(942)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
125A	320	Y	32	74	140	240	417	700	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(203)	(312)	(432)	(574)	(778)	(1100)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
150A	370	Y	27	63	117	194	306	500	800	900	1000	1200	1400	1600	1800	2000	
		(L)	(203)	(309)	(423)	(549)	(700)	(918)	(1257)	(1414)	(1571)	(1885)	(2199)	(2513)	(2827)	(3142)	
200A	520	Y	19	44	80	128	190	270	375	518	754	1200	1400	1600	1800	2000	
		(L)	(201)	(304)	(411)	(522)	(640)	(768)	(913)	(1088)	(1344)	(1885)	(2199)	(2513)	(2827)	(3142)	
250A	700	Y	14	32	58	92	135	187	251	327	420	678	1400	1600	1800	2000	
		(L)	(201)	(302)	(406)	(511)	(620)	(733)	(852)	(978)	(1114)	(1442)	(2199)	(2513)	(2827)	(3142)	
300A	900	Y	11	25	45	70	102	141	187	241	303	458	668	975	1800	2000	
		(L)	(200)	(301)	(403)	(507)	(612)	(719)	(829)	(942)	(1060)	(1314)	(1604)	(1971)	(2827)	(3142)	